

[product

KITCHEN TAP / MIXER / PULL OUT SPRAY

[action. SINGLE LEVER MIXER.]

[water. WARM + COLD.]

[knurl. LINEAR.]

[range. KITCHEN.]

A kitchen tap with single lever mixer with pull out spray. This tap has been cast, sand-blasted and machined from solid metal in Italy. It features our signature linear-knurl pattern and is refined by hand. Available in four metal finishes: steel, brass, gun metal and welders black.










BUSTERANDPUNCH.COM [end. ORDINARY.]

[type. KITCHEN TAP / MIXER WITH PULL OUT SPRAY.]

[info. MEASUREMENTS.]

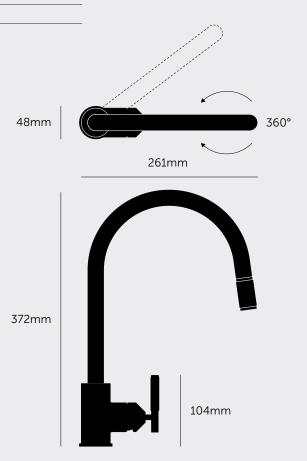

[info. SPECIFICATIONS.]

A kitchen mixer tap with pull out spray, with a single lever action that mixes water from the hot and cold pipes in your kitchen.

The mixer tap with pull out spray can be installed on a worktop with a maximum thickness of 70mm. There are no components available for fixing this tap on a worktop with a thickness of greater than 70mm.

Minimum recommended water pressure: 10.2 PSI (0.7 BAR).

Maximum recommended water pressure: 72 PSI (5 BAR).

Recommended maximum hot water temperature: 70 °C (158°F).

Recommended temperature range: 5 - 60 °C (41 - 140°F).

Pull out spray connection hose length: 1.7 m $\,$

Pull out spray extraction length: 45 cm (approx from end of mixer)

UK flexible connector hose diameter: 1/2" \varnothing EU flexible connector hose diameter: 3/8" \varnothing

Note: exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve may be required to be fitted in high water pressure situations.

[info. FINISH & SKU NUMBERS.]		
[finish.]	[UK.]	[EU.]
Steel	RKT-071664	C0-052626
Brass	RKT-051665	C0-072625
Gun Metal	RKT-351667	C0-592627
Welders Black	RKT-591666	C0-352628

[info. INCLUDED.]

1 x Kitchen Mixer Tap with Pull Out Spray

- 2 x Flexible connector hoses
- 1 x Tap Base and set of washers
- 1 x Threaded bar and nut
- 1 x Supporting tap brace (for surfaces with thickness <5mm)

[info. INSTALLATION TOOLS REQUIRED.]

1 x Adjustable spanner

[please. NOTE.]

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device.

Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (100 kPa – 500 kPa).

[info. **CARE INSTRUCTIONS.**]

Wipe with damp cloth with no loose hairs, avoid using any chemicals. All finishes are prone to aging.